



Steel Product Line

Built to Heavy-Duty Standards



Shown with optional equipment

Steel Landscaper Body



Platform Body



Stake Body

RUGGED | DURABLE | DEPENDABLE | VERSATILE

- VERSATILE
- LEGENDARY quality and durability



Steel Product Line

The Rugged American Steel Landscaper... Engineered to meet the demands of the landscape industry

Options:

- Combination ICC underride pintle hook mount hitch
- Diamond plate storage boxes
- Pull-down access step at side door
- Roll-up tarp
- 14" Coal chute installed in rear tailgate
- Solid rear barn doors to replace upper doors and tailgate (no header)
- Higher bulkhead for taller chassis
- Full rear barn doors



Shown with optional equipment

| DIMENSIONAL DATA | |
|---------------------------------------|-----------------|
| Body Length | 12' |
| Body Width | 88" ID / 96" OD |
| Side Height | 48" |
| Tailgate Height | 22" |
| Rear Overhang | 30" |
| Model RTB-813 Subframe Hoist Capacity | 8-13 Ton |
| Body and Hoist Weight | 3,510 lbs. |

NOTE: Not recommended for chassis less than 16K GWVR

Steel Landscaper

Heavy-duty 10 gauge hot rolled steel floor on four structural steel crossmembers

Easy open heavy-duty 22" high tailgate with double-acting single lever quick release mechanism. Internal reinforced bottom boxed channel with heavy-duty tapered upper gate pins with grease fittings

Rear tail lights and marker lights recessed in lower apron

Corrosion resistant A40-A60 coating weight steel side wall construction. Fully welded construction with full depth rear corner posts with provisions for roll-up tarp

Full width upper rear doors with holdbacks to allow full opening (no rear header). Doors equipped with heavy-duty hinges and door latches

Exclusive acrylic E-Coat with high-gloss black Powder Coat finish

Wide access side door with 10 gauge A40-A60 coating weight steel corrugated with two heavy-duty hinges for a 52" clear opening

Heavy-duty, A40-A60 coating weight steel construction on 42" deep cab guard with a 500 lb. capacity

Standard hoist assembly Model RTB-813 Subframe hoist (8-13 ton capacity hoist). Double acting (power up/power down) electric hydraulic operation



Options:

- 7 or 10 Gauge steel floor (smooth or 3/16" treadplate)
- Treated wood floor
- Rear hitch package and connection plug
- Acrylic bulkhead window cover
- Underbody tool boxes
- Hoist applications
- Sliding winches
- Liftgates
- Apitong wood floor
- Smooth steel and treadplate overlay
- 102" wide body

EXCLUSIVE TRIPLE PROTECTION

- 1 A40-A60 Coating Weight Steel**
- 2 E-Coat Primer**
- 3 Powder Coat Finish**

3 year warranty
Manufactured With Confidence



Hoist Options

Model RTB-813


Single cylinder double acting design for light-duty single axle trucks with bodies from 9'-12'

Model 1627 FDA NTEA class F

Single cylinder design for medium-duty single axle trucks with bodies from 14'-20'

Model 2627 FDA NTEA class H

Twin cylinder design for tandem axle heavy-duty trucks with bodies from 18'-24'

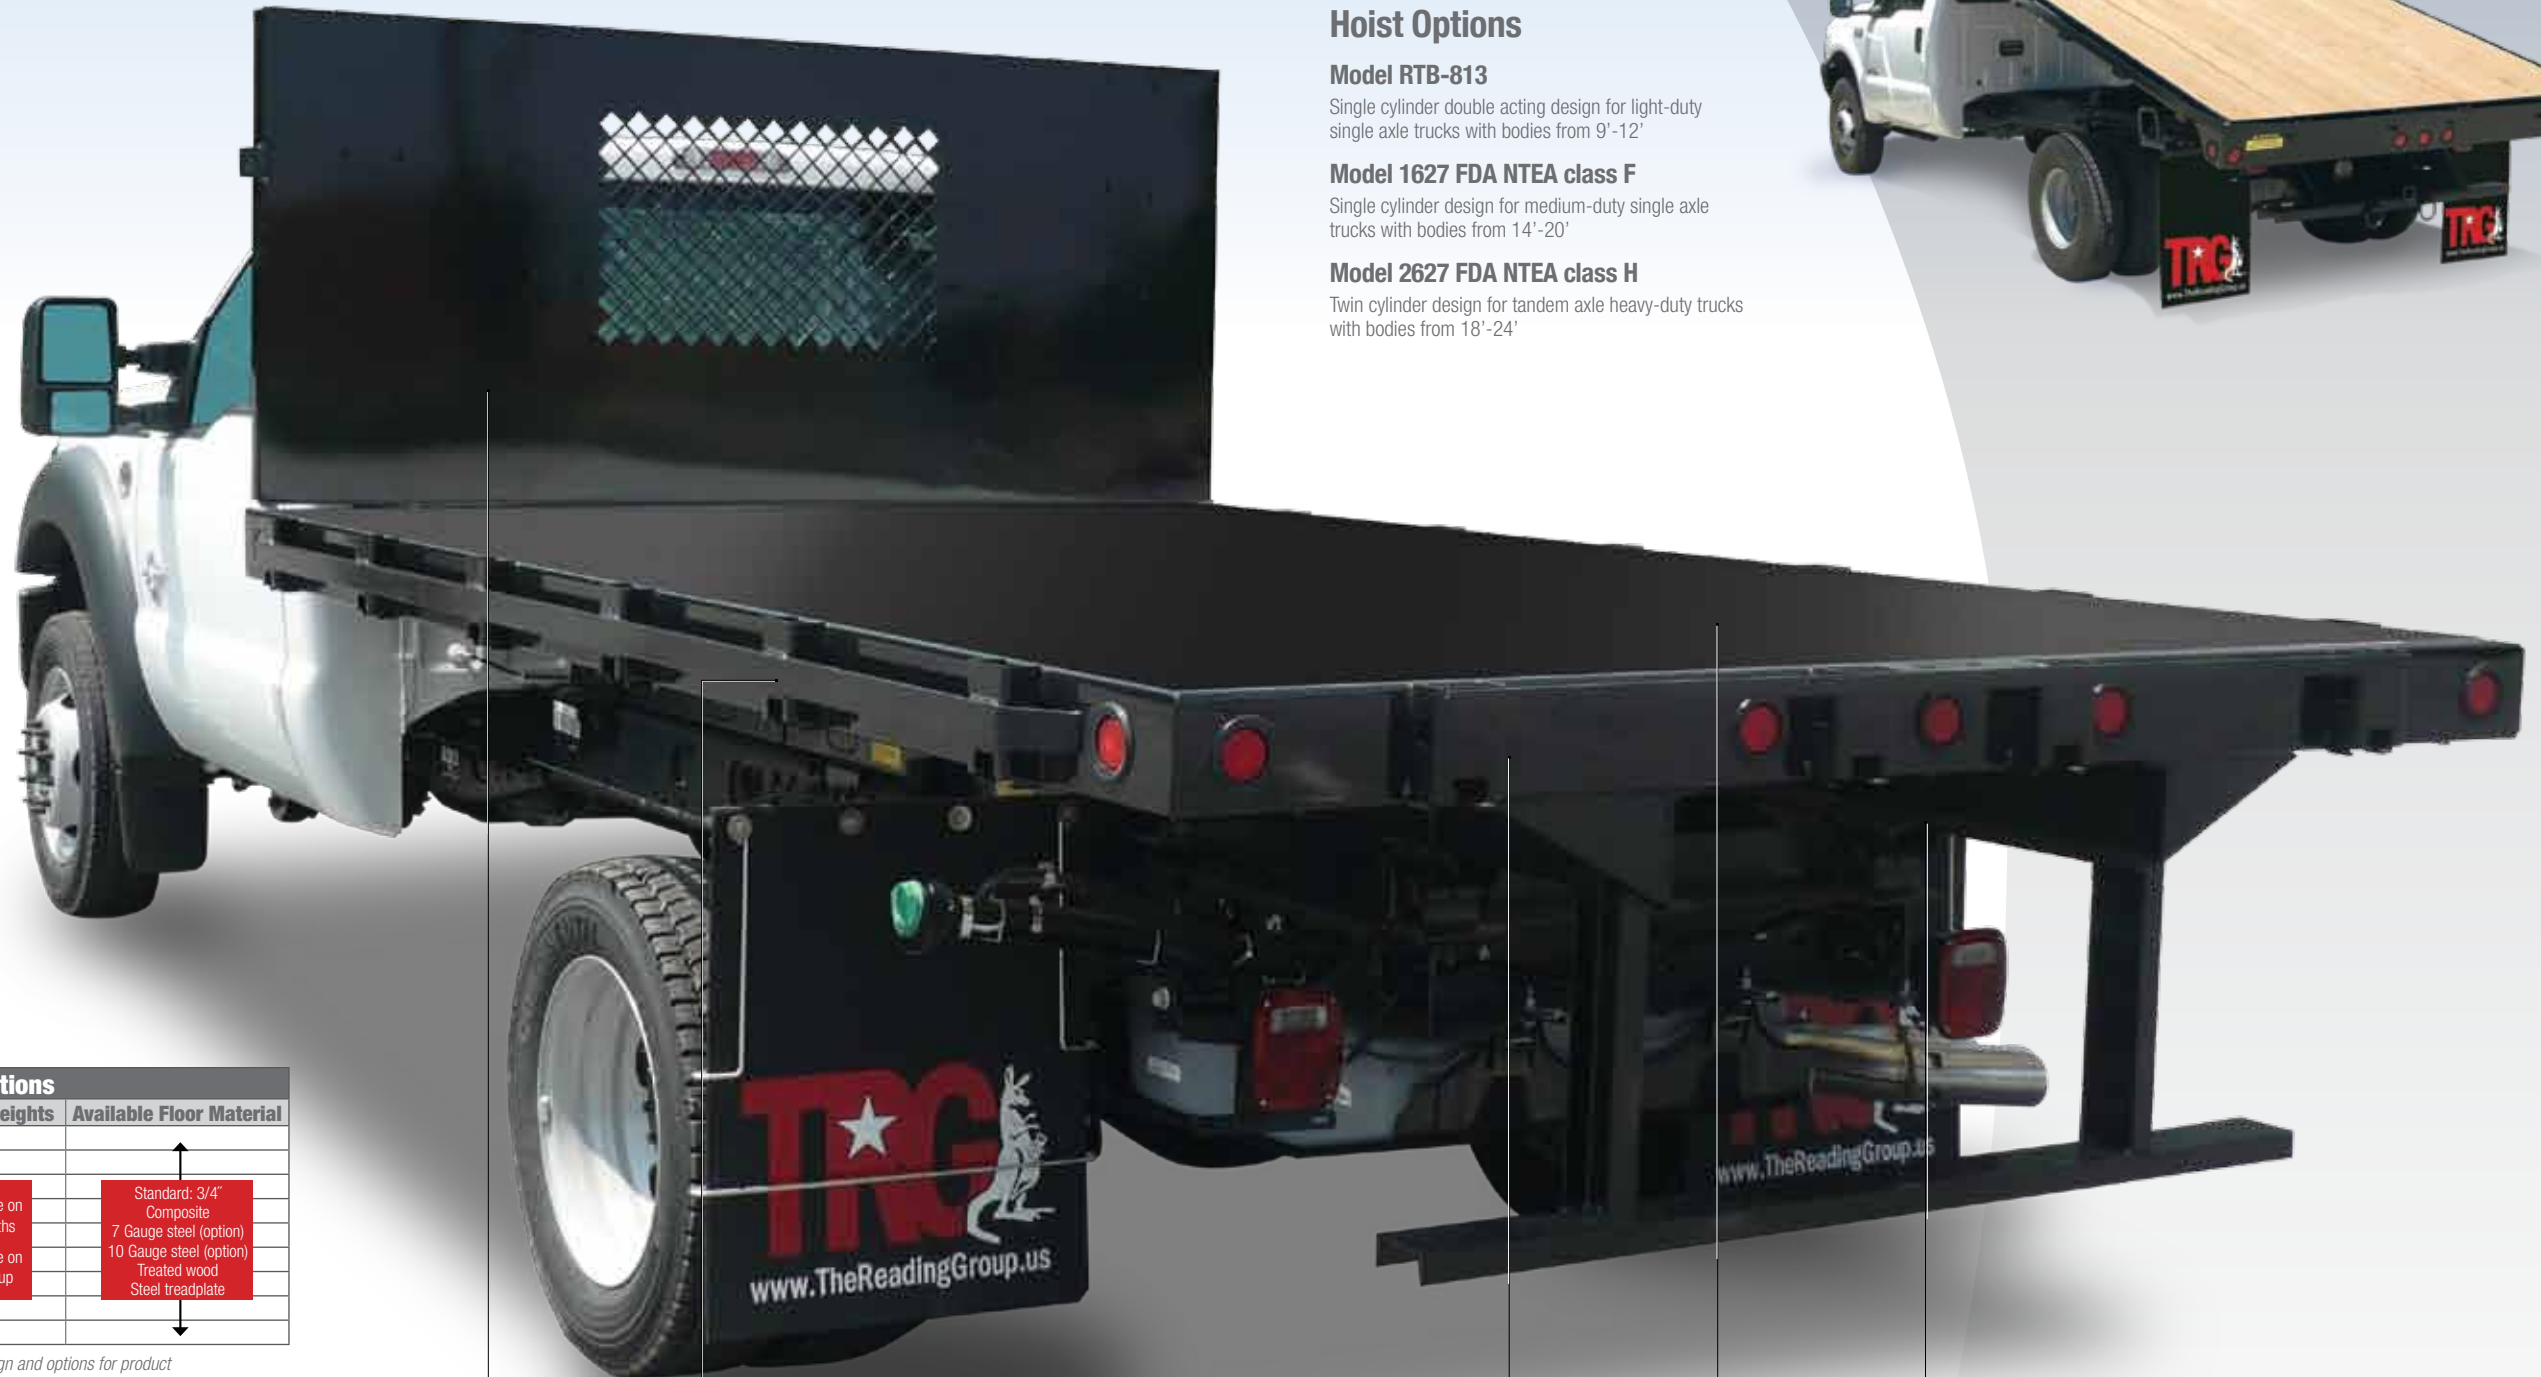

Body Specifications

| Body Length | Body Width | Available Side Heights | Available Floor Material |
|-------------|------------|--|---|
| 10'6" | 96" | 29' racks available on 10' and 12' lengths | Standard: 3/4" Composite 7 Gauge steel (option) 10 Gauge steel (option) Treated wood Steel treadplate |
| 12'6" | 96" | | |
| 14'6" | 96" | | |
| 16'6" | 96" | 40' racks available on lengths 10' and up | |
| 18'6" | 96" | | |
| 20'6" | 96" | | |
| 22'6" | 96" | | |
| 24'6" | 96" | | |
| 26'6" | 96" | | |

TRG reserves the right to change the product offerings, design and options for product improvement purposes

Available in sizes from 10' - 26'. 6" Structural main long sill. 96" Wide body

12" crossmember spacing throughout all body sizes

Steel bolt on bulkhead or weld on steel bulkhead with window grid cut-out on bulkhead

Reinforced external stake pockets with outside 2" tie rail

Entire body black Powder Coated finish over industry leading E-Coat priming

Floors available: wood, smooth steel, or steel treadplate

Full side-to-side 11 gauge formed steel rear endplate and side rails with recessed rubber mounted lights to shield and protect lights from impact. All lights and reflectors meet FMVSS 108 requirements

Bodies constructed from 11 gauge formed steel frame with Powder Coat black finish

Platform Bodies

Options:

- Rear hitch package and connection plug
- Acrylic bulkhead window cover
- Underbody tool boxes
- Hoist applications
- 102" wide body

EXCLUSIVE TRIPLE PROTECTION

- 1 A40-A60 Coating Weight Steel
- 2 E-Coat Primer
- 3 Powder Coat Finish

3 year warranty
Manufactured With Confidence



Shown with optional equipment

Stake Bodies

| Body Specifications | | | |
|---------------------|------------|---|---|
| Body Length | Body Width | Available Side Heights | Available Floor Material |
| 10'6" | 96" | 29' racks available on 10' and 12' lengths 40' racks available on lengths 10' and up | Standard: 3/4" Composite 7 Gauge steel (option) 10 Gauge steel (option) Treated wood Steel treadplate |
| 12'6" | 96" | | |
| 14'6" | 96" | | |
| 16'6" | 96" | | |
| 18'6" | 96" | | |
| 20'6" | 96" | | |
| 22'6" | 96" | | |
| 24'6" | 96" | | |
| 26'6" | 96" | | |

TRG reserves the right to change the product offerings, design and options for product improvement purposes

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|--|---|--|---|---|--|
| Rubber coated caps on latch and retention handles | 12" crossmember spacing throughout all body sizes | Powder Coated rear swing gates that bolt on | 16 Gauge A40-A60 coating weight steel rollform horizontal slats 6-1/8" wide welded to 14 gauge A40-A60 coating weight steel posts | Entire body black Powder Coated finish over industry leading E-Coat priming | Floors available: wood, smooth steel, or steel treadplate | Powder Coated rack system with theft deterrent rack retention system and spring loaded rack connecting hardware | Reinforced external stake pockets with outside 2" tie rail | Steel bolt on bulkhead or weld on steel bulkhead with window grid cut-out on bulkhead | Full side-to-side 11 gauge formed steel rear endplate and side rails with recessed rubber mounted lights to shield and protect lights from impact. All lights and reflectors meet FMVSS 108 requirements | Spring assisted, twist lock retention latches | Bodies constructed from 11 gauge roll formed A40-A60 coating weight steel frame with Powder Coat black finish | Available in sizes from 10' - 26'. 6" Structural main long sill. 96" Wide body |
|---|---|---|---|---|---|---|--|---|--|---|---|--|

The Reading Group has a full line of trucks built for the long haul.



Cut-Away Van Bodies



Steel Contractor Bodies



Steel Stake and Platform Bodies



Steel Landscaper



Utility Bodies



Dump Bodies



Dry Freight Van Bodies



Redi-Dek™



Forestry Bodies



Steel Service Bodies



 Drop Side Dump Bodies



 Aluminum Service Bodies



 Composite Landscaper



 S.M.A.R.T. Racks



 Composite Platform Bodies



 Service Vans
57" and 75" single and dual wheel



Locations
Abington, PA
Atlanta, GA
Bowmansville, PA

Cleveland, OH
Clinton, MD
Columbus, OH
Denver, PA

LaGrange, TX
Louisville, KY
Pontiac, MI
Portland, OR

Reading, PA
Seneca, PA
Suffolk, VA
Tampa, FL

SOLD AND SERVICED LOCALLY BY

All dimensions subject to plus or minus tolerance of 1/4" and all dimensions and specifications are subject to change without notice. Some items displayed in photographs are optional. Aluma-Fill, Aluma-Chock, Dual-Pro, Extend-A-Sheaf, Grip-'n-Glide, Latch-Matic, Marauder, Reading, Redi-Dek, Rhino Linings, Rugged American, S.M.A.R.T. Racks, Spacemaker, Tool-Mates, and TUFF STUFF are registered trademarks of The Reading Group, LLC in the United States and some foreign countries. The Reading kangaroo is a trademarked image and may not be reproduced or used without express permission from The Reading Group.

TheReadingGroup.us

TRG10-SPL-15M-08

© 2010 The Reading Group, LLC